

South Central Ontario
Orthophotography
Project (SCOOP) 2013
Digital Surface Model and
Digital Terrain Model
User Guide

**Provincial Mapping Unit
Mapping and Information Resources Branch
Corporate Management and Information Division
Ministry of Natural Resources and Forestry**

2017-01-27

Disclaimer

This technical documentation has been prepared by Her Majesty the Queen in right of Ontario as represented by the Ministry of Natural Resources and Forestry (the “Ministry”). No warranties or representations, express or implied, statutory or otherwise shall apply or are being made by the Ministry with respect to the documentation, its accuracy or its completeness. In no event will the Ministry be liable or responsible for any lost profits, loss of revenue or earnings, claims by third parties or for any economic, indirect, special, incidental, consequential or exemplary damage resulting from any errors, inaccuracies or omissions in this documentation; and in no event will the Ministry’s liability for any such errors, inaccuracies or omissions on any particular claim, proceeding or action, exceed the actual consideration paid by the claimant involved to the Ministry for the materials to which this instructional documentation relates. Save and except for the liability expressly provided for above, the Ministry shall have no obligation, duty or liability whatsoever in contract, tort or otherwise, including any liability or negligence. The limitations, exclusions and disclaimers expressed above shall apply irrespective of the nature of any cause of action, demand or action, including but not limited to breach of contract, negligence, strict liability, tort or any other legal theory, and shall survive any fundamental breach or breaches.

Cette publication spécialisée n’est disponible qu’en anglais.

Additional Information

For more information about this document, please contact Provincial Mapping Unit at pmu@ontario.ca.

Executive Summary

Key Words

South Central Ontario Orthophotography Project, Digital Elevation Model, Digital Surface Model, Digital Terrain Model, Elevation, Orthoimagery, Orthophoto, Imagery and Aerial Photography.

Abstract

The SCOOP 2013 DSM and DTM are 2 metre raster elevation products that were generated from the SCOOP 2013 Classified LAS. These products were generated in-house by Mapping and Geomatics Services Section (MGSS) staff in a continuing effort to improve surface and ground elevation products.

Table of Contents

Disclaimer	2
Additional Information.....	2
Executive Summary	3
Key Words.....	3
Abstract.....	3
Table of Contents.....	4
List of Figures.....	5
List of Acronyms.....	6
List of Definitions	7
Mass Points.....	7
Digital Elevation Model (DEM)	7
Digital Terrain Model (DTM).....	7
Digital Surface Model (DSM).....	8
1. Product Description	9
1.1 Acquisition	9
1.2 Geographic Extent.....	9
1.3 Reference System.....	10
1.3.1 Horizontal Reference System.....	10
1.3.2 Vertical Reference System	10
1.4 Vertical Accuracy Assessment	10
1.5 Spatial Resolution	10
2. Product Details	11
2.1 Classified LAS, DSM and DTM	12
2.1.1 Classified LAS	12
2.1.2 DSM	13
2.1.3 DTM	13
2.2 Data Delivery Format	13
2.3 Use Restrictions	14

List of Figures

Figure 1: SCOOP 2013 DSM and DTM Tiles	9
Figure 2: SCOOP Products	12
Figure 3: Eight Downloadable Packages.....	14

List of Acronyms

CGVD: Canadian Geodetic Vertical Datum

DEM: Digital Elevation Model

DSM: Digital Surface Model

DTM: Digital Terrain Model

IfSAR: Interferometric Synthetic Aperture Radar

LiDAR: Light Detection and Ranging

LIO: Land Information Ontario

MNRF: Ministry of Natural Resources and Forestry

MGSS: Mapping and Geomatics Services Section

NAD: North American Datum

NVA: Non-Vegetated Accuracy

PMU: Provincial Mapping Unit

RMSEz: Root Mean Square Error in Z

SCOOP: South Central Ontario Orthophotography Project

TIN: Triangular Irregular Networks

UTM: Universal Transverse Mercator

VVA: Vegetated Vertical Accuracy

List of Definitions

Mass Points

Mass points are irregularly spaced points, each with x/y location coordinates and z-values, typically (but not always) used to form a TIN. When generated manually, mass points are ideally chosen to depict the most significant variations in the slope or aspect of TIN triangles. However, when generated automatically, e.g., by LiDAR or IfSAR scanner, mass point spacing and patterns depend upon the characteristics of the technologies used to acquire the data.

Digital Elevation Model (DEM)

DEM is a generic term for digital topographic and/or bathymetric data that is comprised of x/y coordinates and z-values to represent an elevation surface.

The term 'DTM' and 'DSM' should be used over the term 'DEM' to more specifically reference 'bare-earth' or 'surface elevation' model products when possible.

The term 'DEM' is to be used as a broader term when referencing a generic elevation data product. The Provincial DEM is an example of a generic elevation product given that it has been constructed using a combination of both 'DTM' and 'DSM' elevation datasets to achieve Provincial coverage.

Digital Terrain Model (DTM)

The bare earth surface (lowest surface, last reflective surface, or LiDAR last-return) represents the surface of the "bare-earth" terrain, after removal of vegetation and constructed features.

Photogrammetry has traditionally generated DTMs when elevations are generated by manual compilation techniques. Unless specified to the contrary, the bare-earth surface includes the top surface of water bodies, rather than the submerged surface of underwater terrain.

Similar to a DSM, a DTM can be structured either as a vector dataset (comprised of mass points and optionally 3D breaklines) to model bare-earth elevations or a raster dataset that is interpolated from the vector elevation data to model bare-earth terrain elevations.

Using modern elevation point cloud classification algorithms and file formats, such as LAS, a DTM can represent a mass point dataset that has been classified for 'bare-earth' terrain elevations.

Digital Surface Model (DSM)

A DSM is the highest reflective surface of ground features captured by the sensor. This surface may also be referred to as the first reflective surface or LIDAR first-return. The DSM may include treetops, rooftops, and tops of towers, telephone poles, and other natural or manmade features; or it may include the ground surface if there is no vegetative ground cover. Photogrammetry, IFSAR, LIDAR and sonar can all provide this type of surface, yet characteristics such as accuracy and degree of detail (ability to resolve desired surface features) may vary significantly across technologies and even within the same technology. With sonar, the DSM may include sunken vessels and other artifacts, whereas the bathymetric surface reflects the natural underwater terrain. Similarly, with photogrammetry, LIDAR, and IFSAR the reflective surface may include any artifact present when the sensor mapped the area, including passing cars and trucks and similar features not normally considered to be part of a digital terrain model.

Similar to a DTM, a DSM can be structured either as a vector dataset (comprised of mass points and optionally 3D breaklines) to model surface elevations or a raster dataset that is interpolated from the vector elevation data to model surface elevations.

Using modern elevation point cloud classification algorithms and file formats, such as LAS, a DSM can represent a mass point dataset that has been classified for 'surface' elevation features.

1. Product Description

1.1 Acquisition

SCOOP 2013 digital imagery was collected for areas in South Central Ontario between April 26th and May 7th 2013. In total, there were more than 40 funding partners involved in SCOOP 2013. The acquired digital imagery encompasses an area of approximately 35,762 square kilometers.

1.2 Geographic Extent

The SCOOP 2013 DSM and DTM products contain 35,921 tiles (1km x 1km) each. These tiles are non-overlapping except between UTM Zones 17 and 18 (see Figure 1). The DSM and DTM products cover South Central Ontario including Peterborough, Haliburton, Muskoka, Simcoe and surrounding areas.

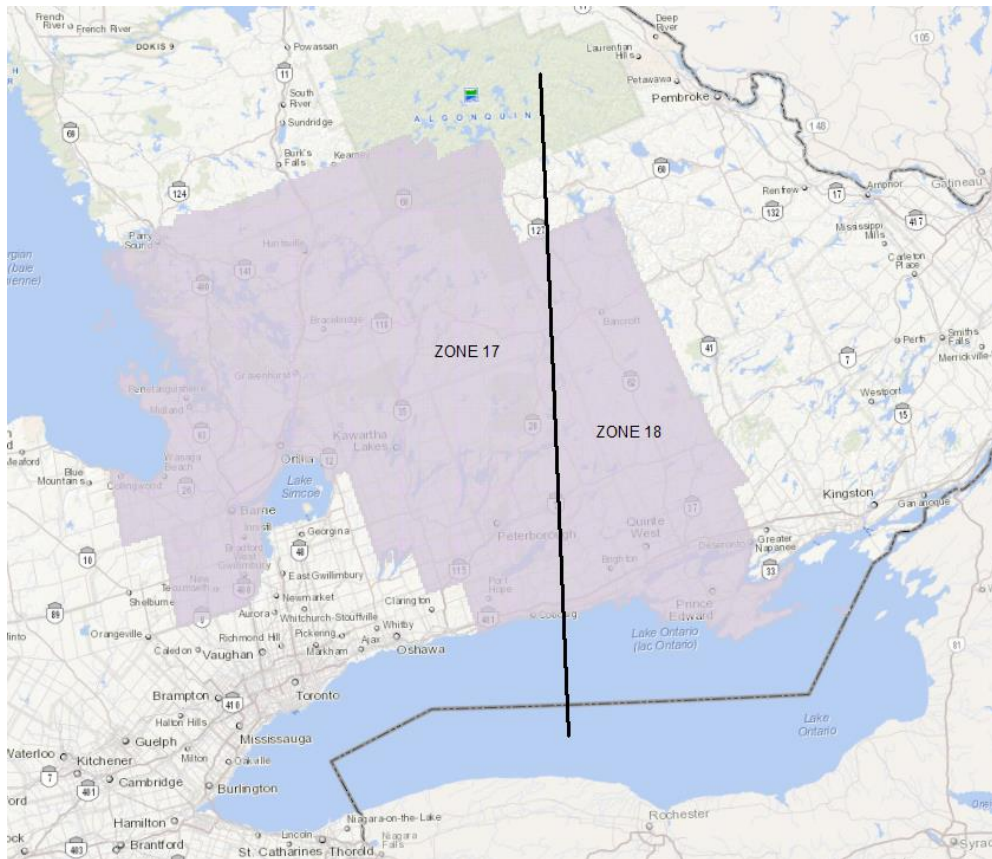


Figure 1: SCOOP 2013 DSM and DTM Tiles

1.3 Reference System

1.3.1 Horizontal Reference System

The horizontal coordinate system of the DSM and DTM are Universal Transverse Mercator (UTM) and cover zones 17 and 18. The horizontal datum is North American Datum of 1983 (NAD83CSRS).

The horizontal unit of measure (coordinate system axis units) for all raster grid cells is metres (m).

1.3.2 Vertical Reference System

The vertical coordinate system is based on the Canadian Geodetic Vertical Datum 1928 (CGVD28) of the Geodetic Survey Division, and is measured in metres above mean sea level. For more information please see the [Geodetic Survey Division of Natural Resources Canada](http://webapp.geod.nrcan.gc.ca/geod/) (<http://webapp.geod.nrcan.gc.ca/geod/>).

The vertical unit of measure (coordinate system axis units) for all raster grid cells is metres (m). One single vertical elevation value represents each raster grid cell.

1.4 Vertical Accuracy Assessment

An assessment has been conducted to evaluate the vertical accuracy of [SCOOP 2013 Digital Surface Model \(DSM\)](#) and [SCOOP 2013 Digital Terrain Model \(DTM\)](#). The results of that assessment including the data used to do that assessment can be downloaded on the metadata record of both SCOOP products.

1.5 Spatial Resolution

The grid spacing is based on Universal Transverse Mercator (UTM) projection with a raster cell resolution of 2 metres. This projection and resolution will match the DEM product. The rasters will be snapped together and share a common origin and resolution.

2. Product Details

The SCOOP 2013 Classified LAS was created using two products; SCOOP 2013 Raw LAS and SCOOP 2013 DEM. The Raw LAS was generated by the imagery contractor from the stereo photography using XPro SGM. The DEM was created using a proprietary 'steam rolling' algorithm to reduce raised surface features in the Raw LAS dataset. It is important to note that DEM does not represent a full 'bare-earth elevation surface since it was created for the sole purpose of orthorectification of the imagery. While the 'steam-rolling' algorithm has allowed for some raised features to be reduced closer to 'bare-earth' elevations (e.g. small buildings, small blocks of forest cover), many features are still raised above ground surface, such as larger buildings, larger forest stands and other raised features. The DSM and DTM were then created by MGSS staff using the Classified LAS.

The derived raster products (DSM and DTM) are a result of a completely automated process. These products are not intended to be a definitive final product to support all types of business needs. It is intended to assist users in further refinement of the elevation. Here is a list of known issues:

- The water contains a lot of noise and is not flat or flowing downstream.
- The pixel correlated elevation (raw LAS) was unable to penetrate dense canopy and therefore there is a lack of points to truly represent the surface in canopy.
- There are many erroneous points that have not been classified properly. These points will be represented in the DSM or DTM as either a pit or a spike.

2.1 Classified LAS, DSM and DTM

After releasing the SCOOP 2013 DEM and the SCOOP 2013 Raw LAS, MGSS staff worked with the raw point cloud LAS data to create a Classified LAS, Digital Surface Model (DSM) and a Digital Terrain Model (DTM) as seen in Figure 2.

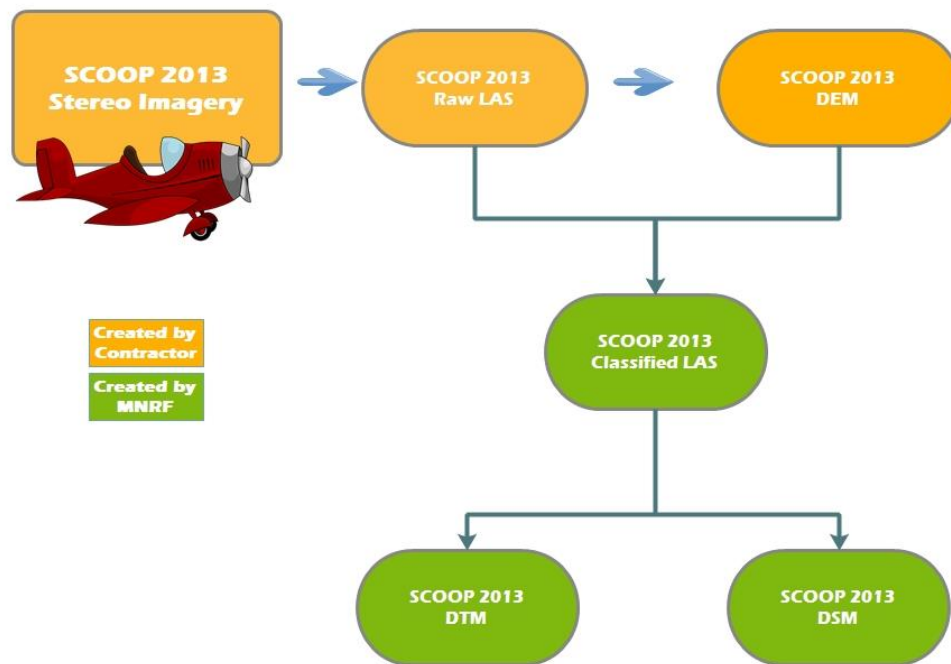


Figure 2: SCOOP Products

2.1.1 Classified LAS

The raw point cloud from the overlapping flight lines were resampled to 50cm and retiled into 1km by 1km tiles and reassembled back into LAS format. This reduces redundant points as well as reducing the number of points. During the retiling, a comparison with the SCOOP 2013 DEM was done to automatically assign the LAS classification. If the DEM was within 50cm vertically, it was assigned a LAS code of 2 (ground) otherwise it was a LAS code of 0 (unassigned).

2.1.2 DSM

The DSM raster was created by using all the points (ground and unclassified) from the Classified LAS to create a raster product. This is a 2m resolution product matching the same tiling and resolution as the DEM. In the production of this raster, the adjacent 8 tiles are also used to prevent any edge effects.

2.1.3 DTM

The DTM raster is produced from only the ground classified points, and then compared with the DSM to ensure that no DTM point would be higher than the DSM.

2.2 Data Delivery Format

SCOOP 2013 DSM and DTM is currently stored and distributed through [Land Information Ontario \(LIO\) Metadata Tool](#)

(<https://www.javacoeapp.lrc.gov.on.ca/geonetwork/srv/en/main.home>).

Both SCOOP DSM and DTM products can be downloaded in eight packages (see Figure 3). Packages A to F in UTM Zone 17. Packages G and H are in UTM Zone 18. Each package contains multiple tiles in image format (.IMG).

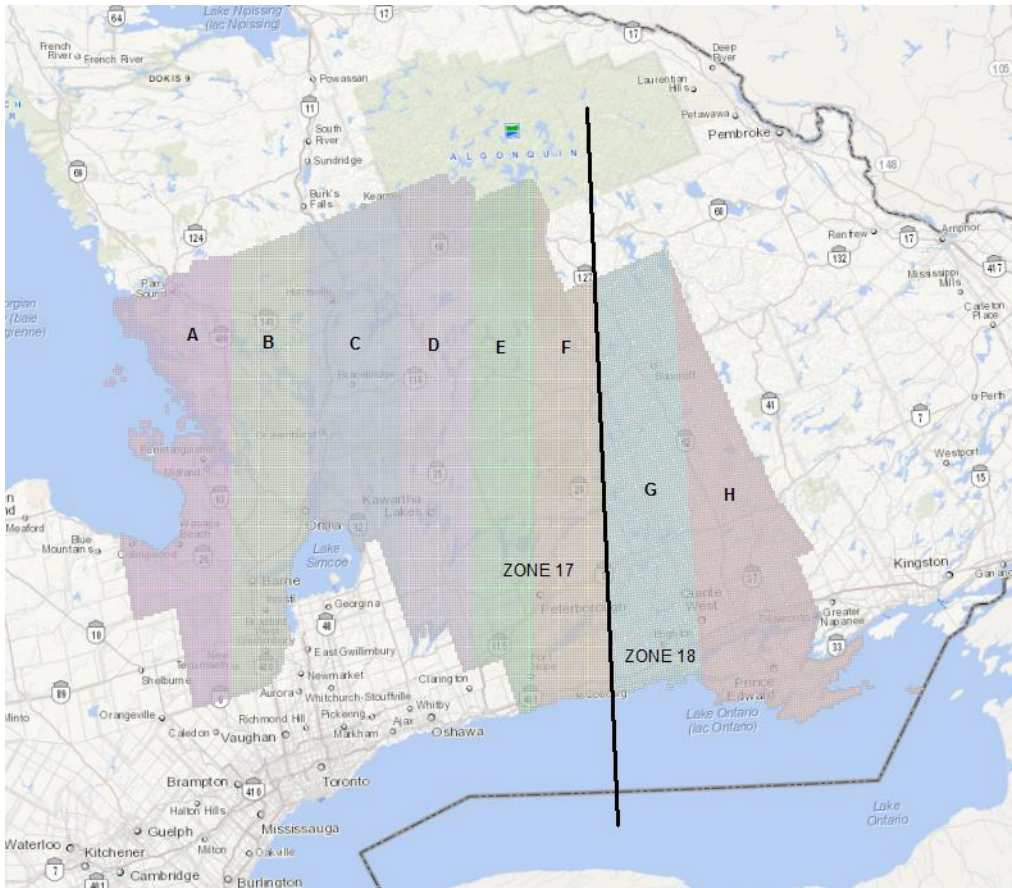


Figure 3: Eight Downloadable Packages

2.3 Use Restrictions

The SCOOP 2013 DSM and DTM are both considered Open Data. You are free to copy, modify, publish, translate, adapt, distribute or otherwise use the Information in any medium, mode or format for any lawful purpose. If you do any of the above you must use the following attribution statement “Contains information licensed under the Open Government Licence – Ontario.”

